



*pan*da 3.0 Mini 2

455W

MAXIMUM MODULE EFFICIENCY

22.8%

POSITIVE POWER TOLERANCE

0~+5_w



N-type TOPCon Bifacial Module

IMPROVED POWER NEVER SETTLE FOR LESS



Backside Yield



Wide Applications



Superior Yield



Outstanding Bifaciality




Excellent Durability



Yingli Solar Website

QUALIFICATIONS & CERTIFICATES

- IEC 61215, IEC 61730, CE
- ISO 9001: Quality management systems
- ISO 14001: Environmental management systems
- IEC 62941: Quality system for PV module manufacturing
- ISO 45001: Occupational health and safety management systems

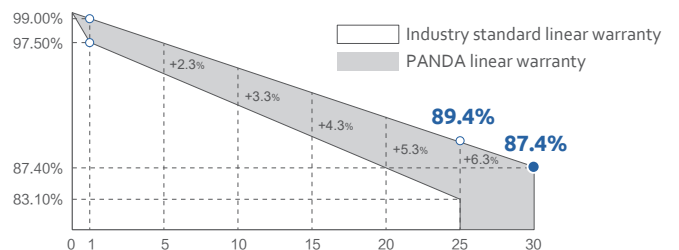

1.00% the 1st year power degradation
0.40% annual power degradation

