



pa η da 3.0 Mini 2

460W

MAXIMUM MODULE EFFICIENCY

23.0%

POSITIVE POWER TOLERANCE

0~+5_w



N-type TOPCon Bifacial Module

**IMPROVED POWER
NEVER SETTLE FOR LESS**



Backside Yield



Wide Applications



Superior Yield



Outstanding Bifaciality



Excellent Durability



Yingli Solar Website



QUALIFICATIONS & CERTIFICATES

IEC 61215, IEC 61730, CE

ISO 9001: Quality management systems


ISO 14001: Environmental management systems

IEC 62941: Quality system for PV module manufacturing




ISO 45001: Occupational health and safety management systems



Munich RE

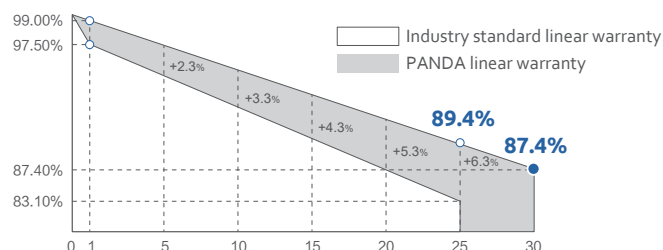

1.00% the 1st year power degradation
0.40% annual power degradation

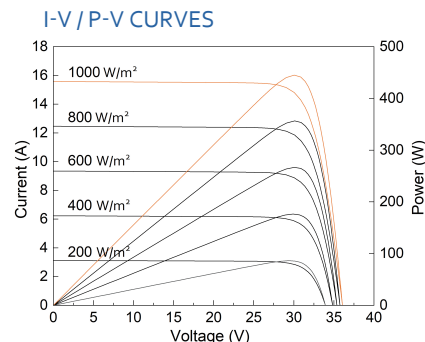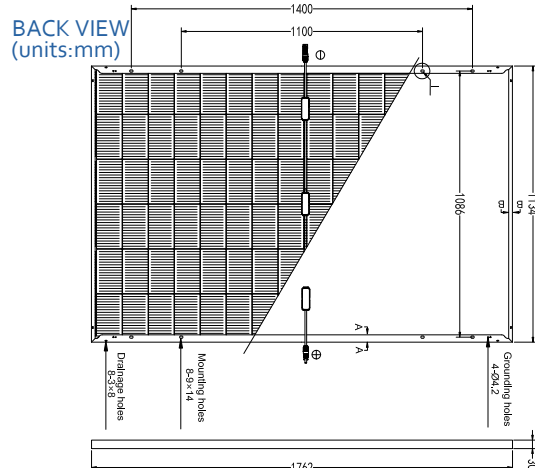

Warning: Read the Installation and User Manual in its entirety before handling, installing and operating Yingli Solar modules.

Electrical Parameters at Standard Test Conditions (STC*)

Module type	YLxxxCF48 i/2 (xxx=P _{max})					
Power output-P _{max} (W)	435	440	445	450	455	460
Power output tolerances-ΔP _{max} (W)	0 / + 5					
Module efficiency-η _m (%)	21.8	22.0	22.3	22.5	22.8	23.0
Voltage at P _{max} - V _{mpp} (V)	29.45	29.68	29.91	30.14	30.37	30.60
Current at P _{max} -I _{mp} (A)	14.78	14.83	14.88	14.94	14.99	15.04
Open-circuit voltage-V _{oc} (V)	35.63	35.84	36.05	36.26	36.47	36.68
Short-circuit current-I _{sc} (A)	15.46	15.52	15.58	15.64	15.70	15.76

*STC: 1000 W·m⁻² irradiance, 25°C cell temperature, AM 1.5.

Electrical Parameters at Nominal Operating Cell Temperature (NOCT*)

Power output-P _{max} (W)	331	335	338	342	346	350
Voltage at P _{max} - V _{mpp} (V)	28.09	28.31	28.53	28.75	28.97	29.19
Current at P _{max} -I _{mp} (A)	11.78	11.82	11.86	11.91	11.95	11.99
Open-circuit voltage-V _{oc} (V)	33.83	34.03	34.23	34.43	34.63	34.83
Short-circuit current-I _{sc} (A)	12.46	12.50	12.55	12.60	12.65	12.70

*NOCT: open-circuit module operation temperature at 800 W·m⁻² irradiance, 20°C ambient temperature, 1 m · s⁻¹ wind speed.

Bifacial Electrical Parameters at Standard Test Conditions(BNPI*)

Power output-P _{max} (W)	482	488	493	499	504	510
Voltage at P _{max} - V _{mpp} (V)	29.45	29.68	29.91	30.14	30.37	30.60
Current at P _{max} -I _{mp} (A)	16.38	16.43	16.49	16.55	16.61	16.66
Open-circuit voltage-V _{oc} (V)	35.63	35.84	36.05	36.26	36.47	36.68
Short-circuit current-I _{sc} (A)	17.13	17.20	17.26	17.33	17.40	17.46

*1000W·m⁻² on the front side and 135 W·m⁻² on the back side , 25°C cell temperature, AM 1.5.
Bifaciality coefficient is 80% ± 5%.

Thermal Characteristics

Nominal operating cell temperature-NOCT(°C)	42 ± 2
Temperature coefficient of P _{max} -γ (% / °C)	- 0.29
Temperature coefficient of V _{oc} -β (% / °C)	- 0.24
Temperature coefficient of I _{sc} -α (% / °C)	0.042

Packaging Specifications

Number of modules per pallet	36
Number of pallets per 40' container	26
Packaging box dimensions (L / W / H)	1780 mm / 1110 mm / 1245 mm
Box weight	793 kg

Operating Conditions

Max. system voltage	1500 V _{DC}
Max. series fuse rating*	30 A
Operating temperature range	- 40°C~ 85°C
Max. static load, front (e.g., snow)	5400 Pa
Max. static load, back (e.g., wind)	2400 Pa
Max. hailstone impact (diameter / velocity)	25 mm / 23 m·s ⁻¹

*Do not connect fuse in combiner box with two or more strings in parallel connection.

General Characteristics

Dimensions (L / W / H)	1762 mm / 1134 mm / 30 mm
Weight	21.0 kg

Construction Materials

Cell (material / quantity)	n-type monocrystalline silicon / 6 x 16
Glass (thickness)	1.6 mm / 1.6 mm
Frame (material)	anodized aluminum alloy
Junction box (type / protection degree)	3 bypass diodes / ≥ IP68
Cable (length / cross-sectional area)	± 1200 mm / 4 mm ²

• Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice.
• The specifications may deviate slightly and are not guaranteed.
• The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.



Yingli Solar Website