



panda 3.0 Pro 1

600W

MAXIMUM MODULE EFFICIENCY

23.2%

POSITIVE POWER TOLERANCE

0~+5_w



N-type TOPCon Bifacial Module

**IMPROVED POWER
NEVER SETTLE FOR LESS**


- Backside Yield
- Wide Applications
- Superior Yield
- $+ \frac{W}{m^2}$ Outstanding Bifaciality
- Excellent Durability



Yingli Solar Website

QUALIFICATIONS & CERTIFICATES

- IEC 61215, IEC 61730, CE
- ISO 9001: Quality management systems
- ISO 14001: Environmental management systems
- IEC 62941: Quality system for PV module manufacturing
- ISO 45001: Occupational health and safety management systems

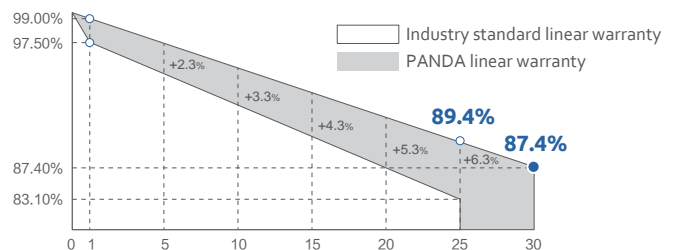

1.00% the 1st year power degradation
0.40% annual power degradation

