



panda

510W

MAXIMUM MODULE EFFICIENCY

23.2%

POSITIVE POWER TOLERANCE

0~+5_w



N-type TOPCon Bifacial Module

IMPROVED POWER NEVER SETTLE FOR LESS



Backside Yield



Wide Applications



Superior Yield



Excellent Durability



More Power, Fewer Panels




Yingli Solar Website




QUALIFICATIONS & CERTIFICATES

IEC 61215, IEC 61730, CE
ISO 9001: Quality management systems
ISO 14001: Environmental management systems
IEC 62941: Quality system for PV module manufacturing
ISO 45001: Occupational health and safety management systems



Warranty partner

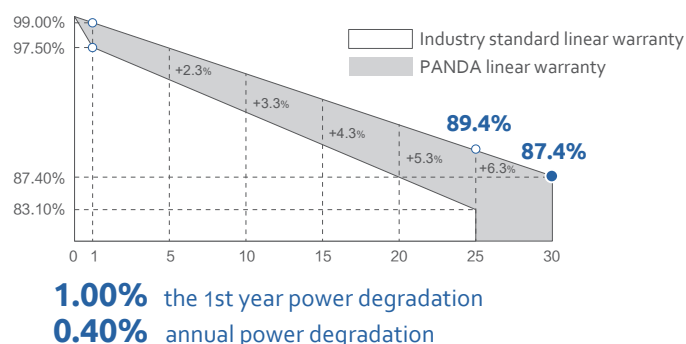

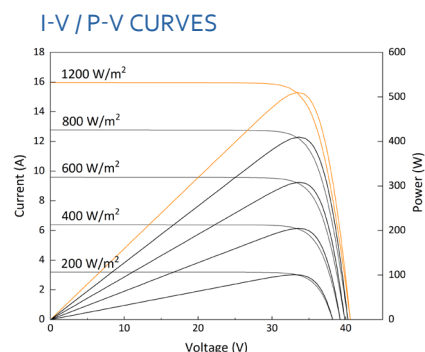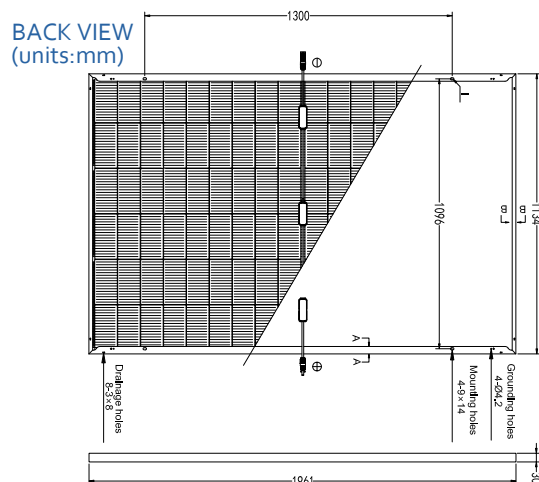

Warning: Read the Installation and User Manual in its entirety before handling, installing and operating Yingli Solar modules.

Electrical Parameters at Standard Test Conditions (STC*)

Module type	YLxxxCF54 i/2 (xxx=Pmax)					
Power output-Pmax (W)	490	495	500	505	510	515
Power output tolerances-ΔPmax (W)	0 / + 5					
Module efficiency-η _m (%)	22.0	22.2	22.5	22.7	22.9	23.2
Voltage at Pmax - V _{mpp} (V)	32.90	33.10	33.30	33.50	33.70	33.90
Current at Pmax-I _{mpp} (A)	14.90	14.96	15.02	15.08	15.14	15.20
Open-circuit voltage-V _{oc} (V)	39.70	40.00	40.20	40.40	40.60	40.80
Short-circuit current-I _{sc} (A)	15.80	15.84	15.87	15.92	15.97	16.02

*STC: 1000 W·m⁻² irradiance, 25°C cell temperature, AM 1.5.

Electrical Parameters at Nominal Operating Cell Temperature (NOCT*)

Power output-Pmax (W)	373	377	380	384	388	392
Voltage at Pmax - V _{mpp} (V)	31.38	31.58	31.77	31.96	32.15	32.34
Current at Pmax-I _{mpp} (A)	11.88	11.93	11.98	12.02	12.07	12.12
Open-circuit voltage-V _{oc} (V)	37.70	37.98	38.17	38.36	38.55	38.74
Short-circuit current-I _{sc} (A)	12.73	12.76	12.79	12.83	12.87	12.91

*NOCT: open-circuit module operation temperature at 800 W·m⁻² irradiance, 20°C ambient temperature, 1 m·s⁻¹ wind speed.

Bifacial Electrical Parameters at Standard Test Conditions(BNPI*)

Power output-Pmax (W)	543	549	554	560	565	571
Voltage at Pmax - V _{mpp} (V)	32.90	33.10	33.30	33.50	33.70	33.90
Current at Pmax-I _{mpp} (A)	16.51	16.58	16.64	16.71	16.78	16.84
Open-circuit voltage-V _{oc} (V)	39.70	40.00	40.20	40.40	40.60	40.80
Short-circuit current-I _{sc} (A)	17.51	17.55	17.58	17.64	17.69	17.75

*1000W·m⁻² on the front side and 135 W·m⁻² on the back side, 25°C cell temperature, AM 1.5.

Bifaciality coefficient is 80% ± 5%.

Thermal Characteristics

Nominal operating cell temperature-NOCT(°C)	42 ± 2
Temperature coefficient of Pmax-γ (% / °C)	- 0.29
Temperature coefficient of Voc-β (% / °C)	- 0.24
Temperature coefficient of Isc-α (% / °C)	0.042

Packaging Specifications

Number of modules per pallet	36
Number of pallets per 40' container	22
Packaging box dimensions (L / W / H)	1980 mm / 1110 mm / 1245 mm
Box weight	1051 kg

Operating Conditions

Max. system voltage	1500 V _{DC}
Max. series fuse rating*	30 A
Operating temperature range	- 40°C~ 85°C
Max. static load, front (e.g., snow)	5400 Pa
Max. static load, back (e.g., wind)	2400 Pa
Max. hailstone impact (diameter / velocity)	25 mm / 23 m·s ⁻¹

*Do not connect fuse in combiner box with two or more strings in parallel connection.

General Characteristics

Dimensions (L / W / H)	1961 mm / 1134 mm / 30 mm
Weight	27.8 kg

Construction Materials

Cell (material / quantity)	n-type monocrystalline silicon / 6 x 18
Glass (thickness)	2.0 mm / 2.0 mm
Frame (material)	anodized aluminum alloy
Junction box (type / protection degree)	3 bypass diodes / ≥ IP68
Cable (length / cross-sectional area)	± 1200 mm / 4 mm ²
Plug connector (type)	Staubli EVO2 or Yitong YT18-01 or Renhe RHC2

*Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice.
The specifications may deviate slightly and are not guaranteed.

*The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.

Visit Our Website

