



pa η da 3.0 Mini 1

455W

MAXIMUM MODULE EFFICIENCY

23.3%

POSITIVE POWER TOLERANCE

0~+5_w



N-type TOPCon Bifacial Module

**IMPROVED POWER
NEVER SETTLE FOR LESS**



Backside Yield



Wide Applications



Superior Yield



Outstanding Bifaciality



Excellent Durability



Yingli Solar Website



QUALIFICATIONS & CERTIFICATES

IEC 61215, IEC 61730, CE

ISO 9001: Quality management systems

ISO 14001: Environmental management systems


IEC 62941: Quality system for PV module manufacturing

ISO 45001: Occupational health and safety management systems





Warranty partner

Munich RE

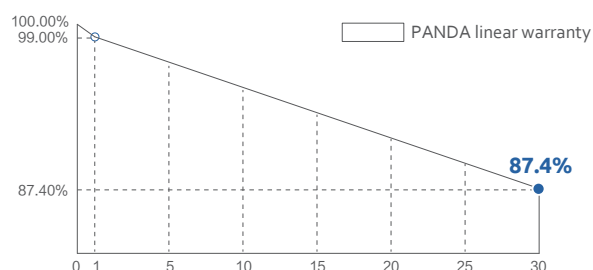


1.00% the 1st year power degradation
0.40% annual power degradation

BACK VIEW
(units:mm)

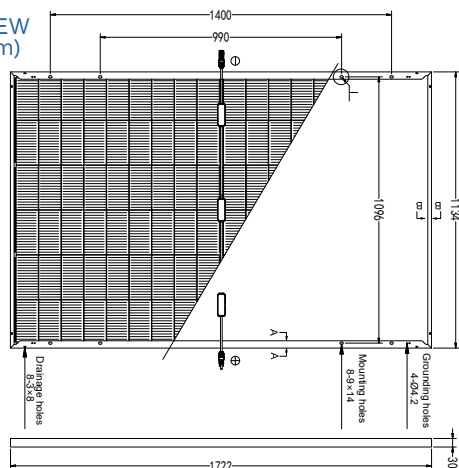


DETAIL I



Warning: Read the Installation and User Manual in its entirety before handling, installing and operating Yingli Solar modules.

I-V / P-V CURVES

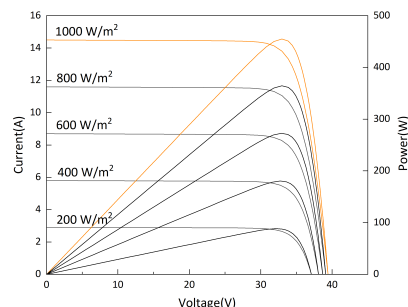

Electrical Parameters at Standard Test Conditions (STC)

Module type	YLxxxCF54 e/2 (xxx=Pmax)					
Power output*-Pmax (W)	430	435	440	445	450	455
Power output tolerances-ΔPmax (W)	0 / + 5					
Module efficiency-η _m (%)	22.0	22.3	22.5	22.8	23.0	23.3
Voltage at Pmax - V _{mpp} (V)	31.89	32.08	32.27	32.46	32.64	32.84
Current at Pmax-I _{mp} (A)	13.49	13.56	13.64	13.71	13.79	13.86
Open-circuit voltage*-V _{oc} (V)	38.51	38.69	38.87	39.05	39.23	39.41
Short-circuit current*-I _{sc} (A)	14.15	14.22	14.29	14.36	14.43	14.50

STC: 1000 W·m⁻² irradiance, 25°C cell temperature, AM 1.5. *Measuring tolerance: ±3%.

Electrical Parameters at Nominal Operating Cell Temperature (NOCT)

Power output-Pmax (W)	327	331	335	338	342	346
Voltage at Pmax - V _{mpp} (V)	30.42	30.60	30.78	30.97	31.14	31.33
Current at Pmax-I _{mp} (A)	10.76	10.81	10.87	10.93	10.99	11.05
Open-circuit voltage-V _{oc} (V)	36.57	36.74	36.91	37.08	37.25	37.42
Short-circuit current-I _{sc} (A)	11.40	11.46	11.51	11.57	11.63	11.68

NOCT: open-circuit module operation temperature at 800 W·m⁻² irradiance, 20°C ambient temperature, 1 m·s⁻¹ wind speed.

Bifacial Electrical Parameters at Standard Test Conditions(BNPI)

Power output-Pmax (W)	477	482	488	493	499	504
Voltage at Pmax - V _{mpp} (V)	31.89	32.08	32.27	32.46	32.64	32.84
Current at Pmax-I _{mp} (A)	14.95	15.02	15.11	15.19	15.28	15.36
Open-circuit voltage-V _{oc} (V)	38.51	38.69	38.87	39.05	39.23	39.41
Short-circuit current-I _{sc} (A)	15.68	15.76	15.83	15.91	15.99	16.07

BNPI: 1000W·m⁻² on the front side and 135 W·m⁻² on the back side, 25°C cell temperature, AM 1.5.
Bifaciality coefficient is 80% ± 5%.

Thermal Characteristics

Nominal operating cell temperature-NOCT(°C)	42 ± 2
Temperature coefficient of Pmax-γ (% / °C)	- 0.29
Temperature coefficient of Voc-β (% / °C)	- 0.24
Temperature coefficient of Isc-α (% / °C)	0.042

Packaging Specifications

Number of modules per pallet	36
Number of pallets per 40' container	26
Packaging box dimensions (L / W / H)	1740 mm / 1110 mm / 1245 mm
Box weight	767 kg

Operating Conditions

Max. system voltage	1500 V _{DC}
Max. series fuse rating*	30 A
Operating temperature range	- 40°C~ 85°C
Max. static load, front (e.g., snow)	5400 Pa
Max. static load, back (e.g., wind)	2400 Pa
Max. hailstone impact (diameter / velocity)	25 mm / 23 m·s ⁻¹

*Do not connect fuse in combiner box with two or more strings in parallel connection.

General Characteristics

Dimensions (L / W / H)	1722 mm / 1134 mm / 30 mm
Weight	20.3 kg

Construction Materials

Cell (material / quantity)	n-type monocrystalline silicon / 6 x 18
Glass (thickness)	1.6 mm / 1.6 mm
Frame (material)	anodized aluminum alloy
Junction box (type / protection degree)	3 bypass diodes / ≥ IP68
Cable (length / cross-sectional area)	± 1200 mm / 4 mm ²

• Due to continuous innovation, research and product improvement, the specifications in this product information sheet are subject to change without prior notice.
• The specifications may deviate slightly and are not guaranteed.
• The data do not refer to a single module and they are not part of the offer, they only serve for comparison to different module types.



Yingli Solar Website